

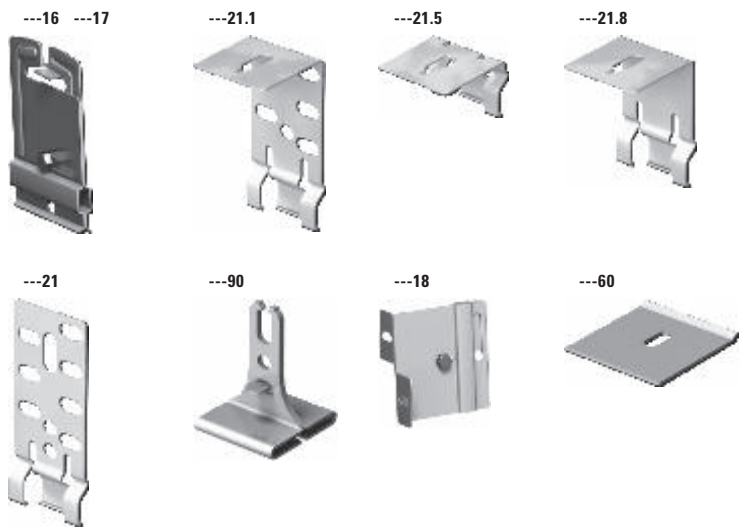


General Suspension
Accessories

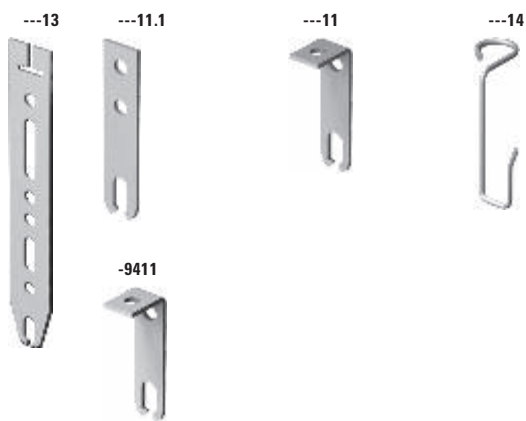

PRODUCT		PER CARTON		
reference	description	pcs.	kg	m³
Standard hanger system				
---11	special hanger (bent) / H=43mm	100	1,5	0,002
---11.1	special hanger / H=60mm	250	1,5	0,002
---13	special hanger / H=160mm	250	10,14	0,006
---14	universal hanger / H=60mm	250	1,38	0,006
-9411	special hanger (bent) (corrosion resistant)	100	1,5	0,002
- Max. load for 11/ 11.1/ 13/ 9411 = 40 kg - Max. load for 14 =18 kg				


Direct hanger				
---16	hanger for IPN	100	7,38	0,019
---17	hanger for IPN	100	11,01	0,019
---18	fixing clip	100	11,18	0,019
---21	fixing clip / H=89mm	100	1,7	0,002
---21.1	fixing clip / H=100mm	100	2,37	0,002
---21.5	fixing clip / H=50mm	100	1,38	0,001
---21.8	fixing clip / H=80mm	100	2,11	0,002
---60	wood joint clip	500	16,19	0,009
---90	suspension clip for "I" and 6000	100	5,86	0,009
- Max. load for 21/ 21.1/ 21.5/ 21.8 = 1) without coupling nail (ref. 10229) = 18 kg 2) with coupling nail (ref. 10229) = 35 kg				

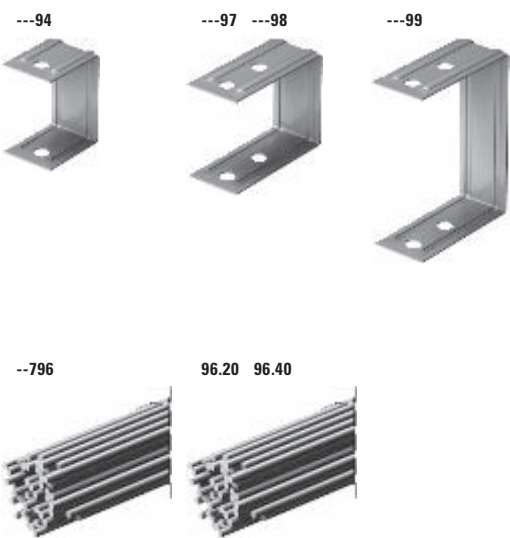

PRODUCT		PER CARTON		
reference	description	pcs.	kg	m³
Holding clamp				
---94	special holding clamp	250	3,45	0,01
---97--00	special holding clamp for 50	250	4,04	0,019
---98--00	special holding clamp for I55	250	4,29	0,019
---99--00	special holding clamp for I70	250	4,71	0,012
- Max. load = 30 kg				


Hanger wire				
--7964015	alu hanger wire / L= 1500 mm	100	4,5	0,27
96.2025	hanger wire ø 2.0 mm / L= 2500 mm	1	25	0,004
96.2035	hanger wire ø 2.0 mm / L= 3500 mm	1	25	0,006
96.4025	hanger wire ø 4.0 mm / L= 2500 mm	100	25	0,004
96.4035	hanger wire ø 4.0 mm / L= 3500 mm	72	25	0,006
- Max. load = 30 kg				

General Suspension
Accessories

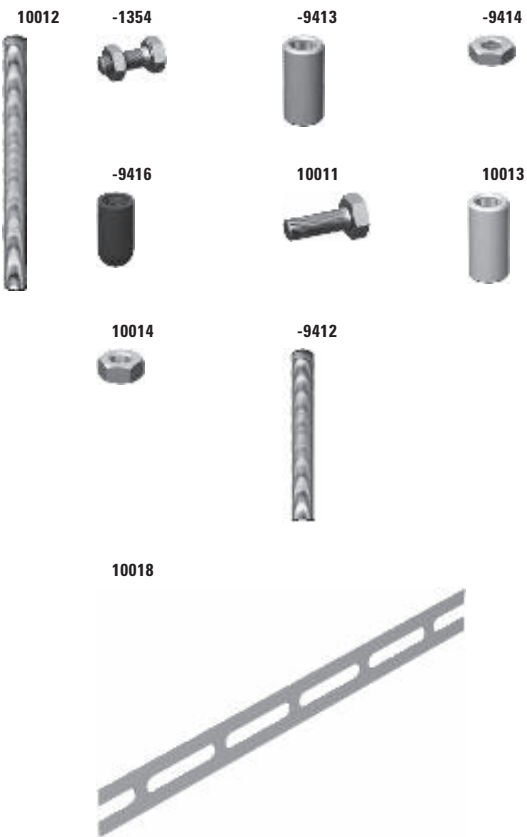



PRODUCT		PER CARTON		
reference	description	pcs.	kg	m³
Bolts and nuts				
-1354	M5x12 bolt + nut - galvanised	100	0,34	-
-9412 ¹	threaded rod M6	100	16,7	0,004
-9413 ¹	spacer sleeve M6	100	0,83	-
-9414 ¹	nut M6	100	0,22	-
-9416 ¹	protective cap M6	100	0,1	-
10011	bolt M6x16 - galvanised	100	0,55	-
10012	threaded wire rod M6	100	16,7	0,005
10013	spacer sleeve M6 for 10012	100	0,83	-
10014	nut M6 - galvanised	100	0,22	-
10018	hanger strap (in coils)	1	7,22	0,005

¹ - Accessories appropriate for use in corrosion hazardous environments (class C according to EN13964).

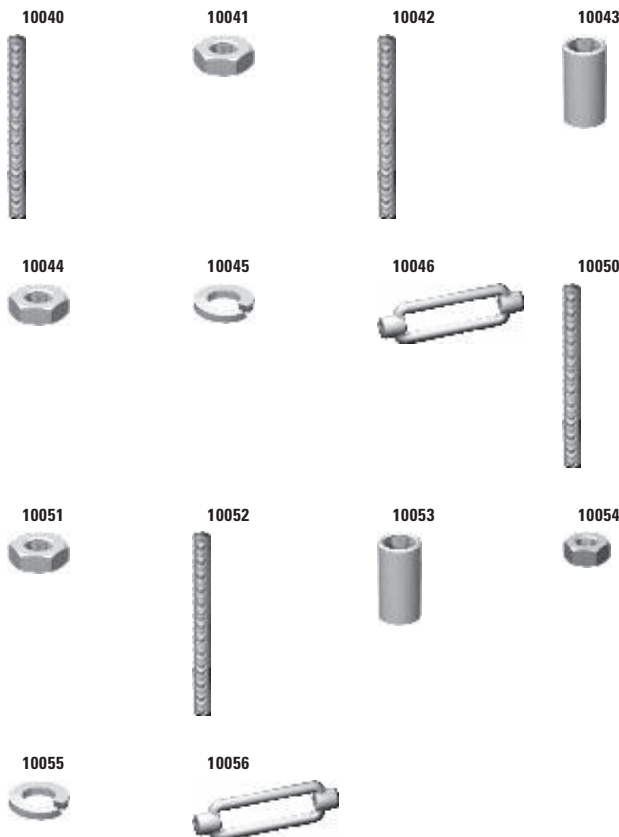


PRODUCT		PER CARTON		
reference	description	pcs.	kg	m³
Bolts and nuts				
10040M8L	threaded rod M8 - left	50	3,24	0,001
10041M8L	left hand thread nut M8 - galvanised	100	0,46	-
10042M8	threaded rod M8 - right	50	15,38	0,003
10043M8	spacer sleeve M8x20 - galvanised	100	0,73	0,001
10044M8	right hand thread bolt M8 - galvanised	100	0,46	-
10045M8	spring washer M8 'Grower' - galvanised	100	0,15	-
10046M8	turnbuckle M8 - galvanised	1	0,09	-
10050M10L	threaded rod M10 - left	50	5,07	0,023
10051M10L	left hand thread nut M10 - galvanised	100	1,15	-
10052M10	threaded rod M10 - right	50	24,35	0,005
10053M10	spacer sleeve M10x20 - galvanised	100	1,88	0,001
10054M10	right hand thread bolt - galvanised	100	1,15	-
10055M10	spring washer M10 'Grower' - galvanised	100	0,25	-
10056M10	turnbuckle M10 - galvanised	1	0,14	-

General Suspension
Accessories

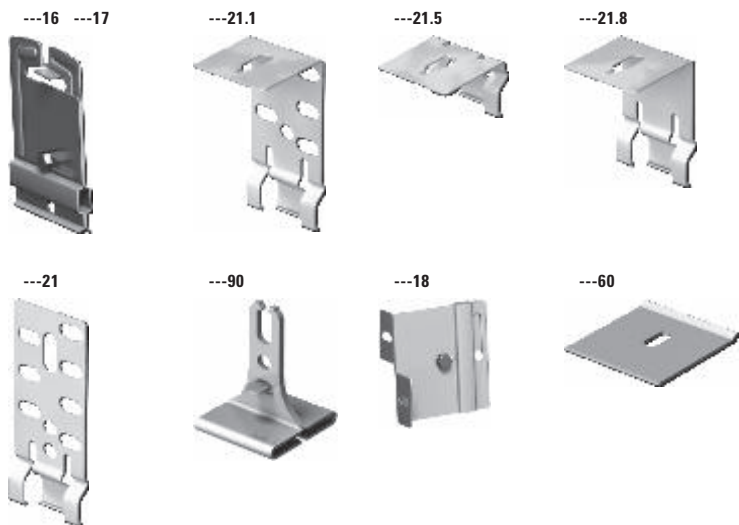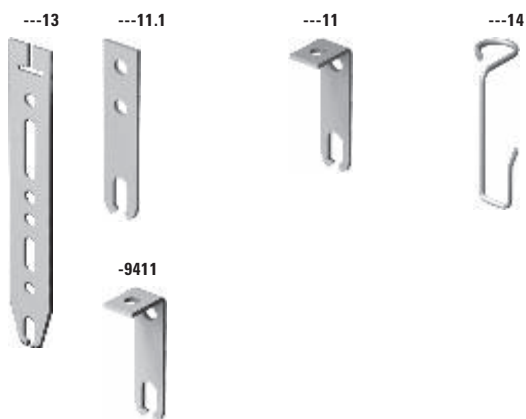

PRODUCT		PER CARTON		
reference	description	pcs.	kg	m³
Standard hanger system				
---11	special hanger (bent) / H=43mm	100	1,5	0,002
---11.1	special hanger / H=60mm	250	1,5	0,002
---13	special hanger / H=160mm	250	10,14	0,006
---14	universal hanger / H=60mm	250	1,38	0,006
-9411	special hanger (bent) (corrosion resistant)	100	1,5	0,002
- Max. load for 11/ 11.1/ 13/ 9411 = 40 kg - Max. load for 14 =18 kg				

Direct hanger				
---16	hanger for IPN	100	7,38	0,019
---17	hanger for IPN	100	11,01	0,019
---18	fixing clip	100	11,18	0,019
---21	fixing clip / H=89mm	100	1,7	0,002
---21.1	fixing clip / H=100mm	100	2,37	0,002
---21.5	fixing clip / H=50mm	100	1,38	0,001
---21.8	fixing clip / H=80mm	100	2,11	0,002
---60	wood joint clip	500	16,19	0,009
---90	suspension clip for "I" and 6000	100	5,86	0,009
- Max. load for 21/ 21.1/ 21.5/ 21.8 = 1) without coupling nail (ref. 10229) = 18 kg 2) with coupling nail (ref. 10229) = 35 kg				

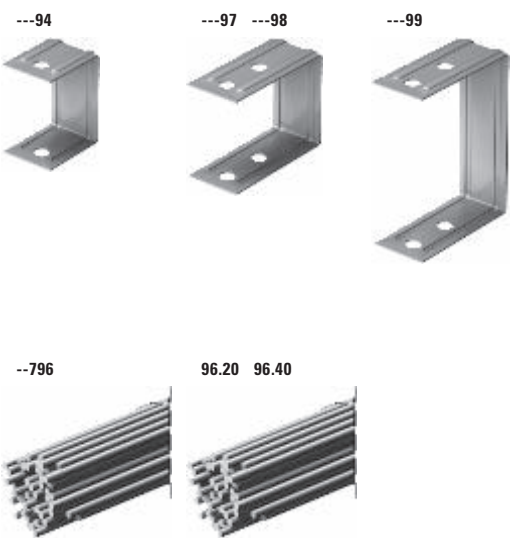

PRODUCT		PER CARTON		
reference	description	pcs.	kg	m³
Holding clamp				
---94	special holding clamp	250	3,45	0,01
---97--00	special holding clamp for 50	250	4,04	0,019
---98--00	special holding clamp for I55	250	4,29	0,019
---99--00	special holding clamp for I70	250	4,71	0,012
- Max. load = 30 kg				

Hanger wire				
--7964015	alu hanger wire / L= 1500 mm	100	4,5	0,27
96.2025	hanger wire ø 2.0 mm / L= 2500 mm	1	25	0,004
96.2035	hanger wire ø 2.0 mm / L= 3500 mm	1	25	0,006
96.4025	hanger wire ø 4.0 mm / L= 2500 mm	100	25	0,004
96.4035	hanger wire ø 4.0 mm / L= 3500 mm	72	25	0,006
- Max. load = 30 kg				