



I-shaped exposed walk-on system.

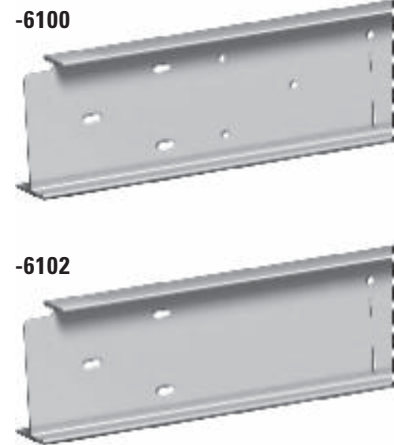

-6102

Diagram of a T-section with dimensions: top flange width 35, total height 100, and bottom flange width 50 mm.

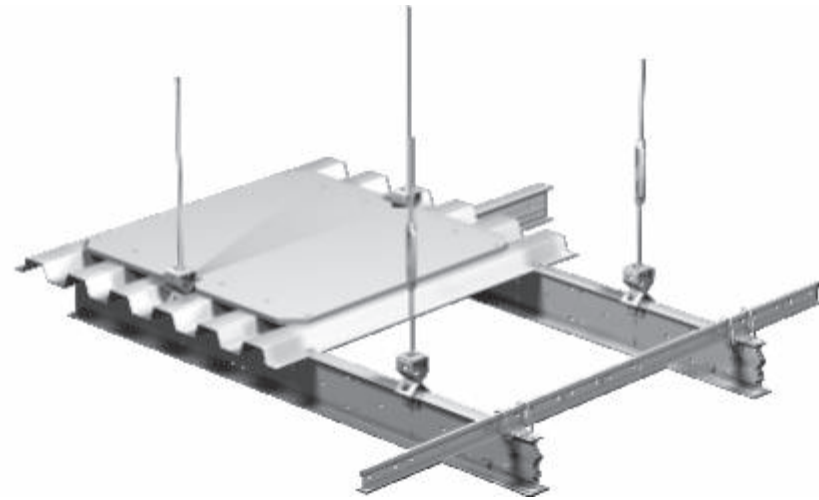

SPANLINE®

- A range of specific accessories and wall angles is offered in combination with system 6000.
- This application requires a very specific installation. It is recommended to consult the technical department of 'Chicago Metallic Continental' for advice.

-6100 10	6 Slots	500	1000	4 x 1000	500
-6100 60	10 Slots	300	600	8 x 600	300
-6100 62	10 Slots	312,5	625	8 x 625	312,5



-6102 60	1 Slot	575	575
-6102 62	1 Slot	600	600

The 6000 system is supplied in colour "global white" 001, white RAL 9010, gray 04, black 08 and "galva" 00. Special lengths and slot patterns available upon request.

---90	10011	10051M10L	10054M10	-6011
--120	10014	10052M10	10055M10	-6013
-6017	10050M10L	10053M10	10056M10	

For the complete overview, please consult page 128 onwards.

Combined modular exposed I & T shaped system for long span applications and heavy panels.

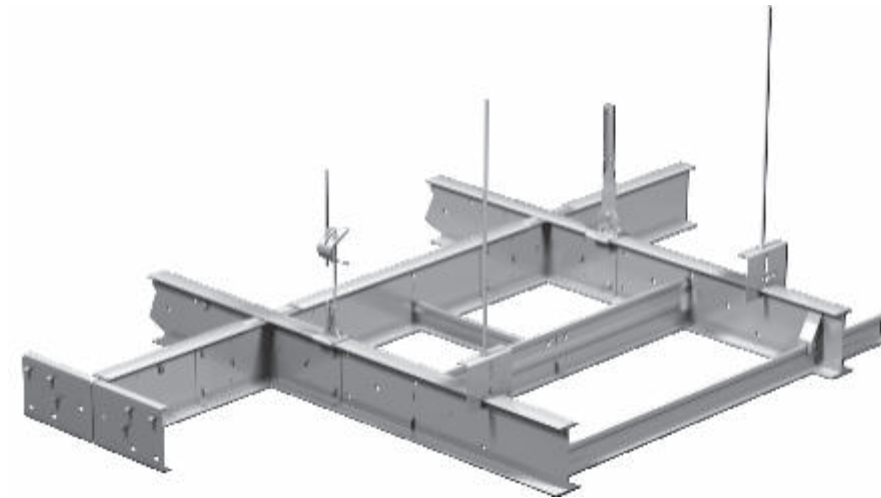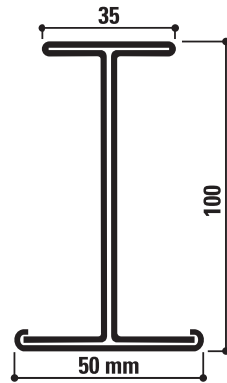


SPANLINE®


-6100



-8856

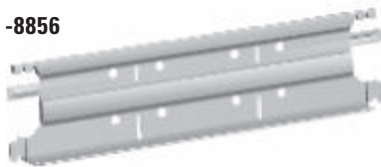

-8858

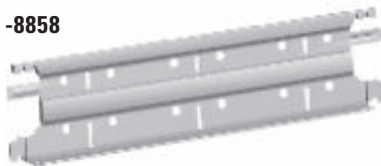

-6102



Main runner

-6100 10 001	6000	14,51	2	12	29,01	0,04	30	1,3	870
-6100 60 001	6000	14,51	2	12	29,01	0,04	30	1,3	870
-6100 62 001	6250	15,11	2	12,5	30,22	0,04	30	1,35	907

Cross tee with joggled ends

-8856 30 001	1800	1,34	12	21,6	16,1	0,02	50	0,76	805
-8856 31 001	1875	1,4	12	22,5	16,76	0,02	50	0,8	838

-8858 30 001	2400	1,78	12	28,8	21,42	0,02	50	0,97	1071
-8858 31 001	2500	1,86	12	30	22,3	0,02	50	1,03	1115

Cross runner	
--------------	--

-6102 60 001	1150	2,78	2	2,3	5,56	0,01	30	0,25	167
-6102 62 001	1200	2,9	2	2,4	5,8	0,01	30	0,26	174

- A range of specific accessories and wall angles is offered in combination with system 6000.

-6100 10	6 Slots	500	1000	4 x 1000	500
-6100 60	10 Slots	300	600	8 x 600	300
-6100 62	10 Slots	312.5	625	8 x 625	312.5

-B856 30	2 Slots	600	600	600
-B856 31	2 Slots	625	625	625

-B858 30	3 Slots	600	600	600	600
-B858 31	3 Slots	625	625	625	625

The 6000 system is supplied in colour "global white" 001, white RAL 9010, gray 04, black 08 and "galva" 00. Special lengths and slot patterns available upon request.

--120	-6015	10014	10042M8	10045M8	-5137
--423	-6018	10040M8L	10043M8	10046M8	-6011
--426	10011	10041M8L	10044M8	-6013	

For the complete overview, please consult page 128 onwards.

-1417 -- 001	3050	1,03	35	106,75	36,12	0,01	60	0,79	2167
-1470 -- 001	3050	0,94	25	76,25	23,53	0,01	60	0,79	1412
-1475 -- 001	3050	1,74	20	61	34,7	0,01	45	0,59	1562

For the complete overview, please consult page 120 onwards.